


Profile DIPOKET

Ref. A01177

Ref. arch H1177

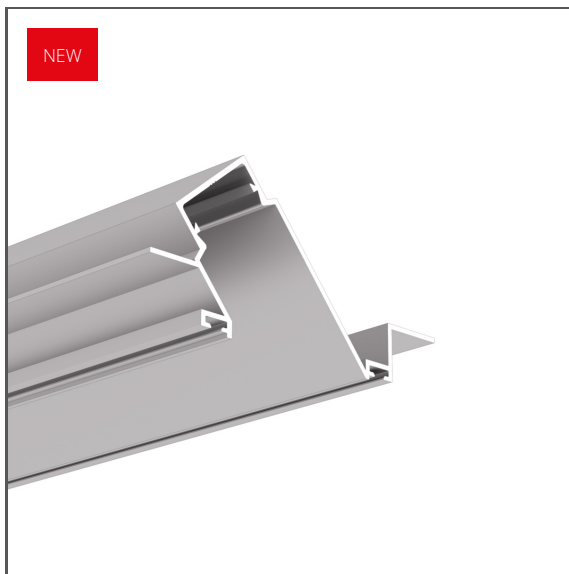

NEW



IP20

- Linear gallery, stage or exhibition lighting
- The lighting fixture integrates with the mounting surface
- Hidden light source
- Lighting angle: 50 Degrees
- Mounting to 12,5 mm - 0.49" drywall
- Stable mounting to a suspended ceiling

APPLICATION

- decorative lighting and functional

MOUNTING


- in drywall, with screws
- can be easily connected into runs and systems

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-22 protective insert should be used
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

1:2

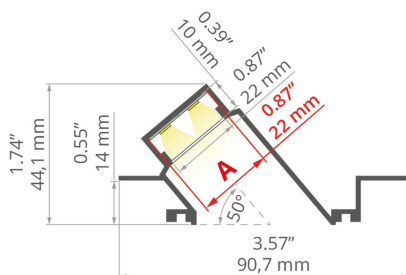

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Width	90.7 mm
Height	44.1 mm
LED gluing width A	22 mm
Lighting at an angle	50
Possibility of obtaining a line of light	yes
Building type	Entertainment/ Arts, Retail
Facility zone	shop windows and exhibition, wall lighting
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Decorative lighting	yes
Functional lighting	yes
Mounting to drywall	yes
To cover with plaster	yes
Wire out back of extrusion	yes

Color	Length	Ref
<input type="checkbox"/> white lacquered	1000 mm	A01177L100D_1 H1177L90100D_1
	2005 mm	A01177L100D_2 H1177L90100D_2
	3010 mm	A01177L100D_3 H1177L90100D_3
<input checked="" type="checkbox"/> silver non anodized	1000 mm	A01177N_1 H1177NA_1
	2005 mm	A01177N_2 H1177NA_2
	3010 mm	A01177N_3 H1177NA_3

Profile DIPOKET

Ref. A01177

Ref. arch H1177



CONNECTOR
ZM-NA-120
C28242N00
Ref. arch 42729



CONNECTOR
ZM-45
C28070N00
Ref. arch 40688