
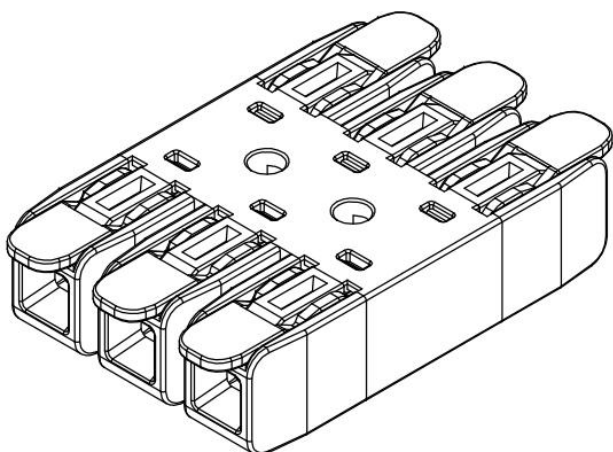


Product Specification		Serial Number		
		Version Number		
		Product Name		
		Part Number		
Cat. No:		Product Image		
Product Features:				
✧ Passed UL & CUL 、 ENEC 、 CQC 、 UKCA 、 CE safety certification;				
✧ Unique shape design, compact size;				
✧ Adopt button type design, easy installation, fast application, safe and reliable, stable conduction performance;				
✧ Made of high-precision imported copper material with good conductivity and contact performance; convenient to clamp the wire, and the clamping wire is tightened after installation, which realize the change of various specifications of wire;				
✧ Wire range:0.5-4mm ² Single hard wire 0.5-2.5mm ² Multi strand hard wire or multi strand flexible wire、 20-12AWG;				
✧ Stripping length:13mm;				
Application field:				
✧ Mainly used for internal connection of the whole machine;				
✧ Internal connection of lighting circuit;				
ENEC、CQC、CE Certificates Technical Parameter:				
Rated current	Wiring specification	Rated current	Rated voltage	450Vac
	0.5mm ²	6A	Flammability	GWIT 850℃
	0.75mm ²	9A	Contact material	Copper+Stainless steel
	1.0mm ²	13.5A	Insulation material	PA66+PC
	1.5mm ²	17.5A	Mounting	Thread-less connection
	2.5mm ²	24A	Wiring specification	0.5-4mm ²
	4.0mm ²	32A	Ambient temperature	T85

UL Certificate Technical Parameter:

Rated current	Wiring specification	Rated current	Flammability	UL94V-2
	20AWG	5A	Contact material	Copper+Stainless steel
	18AWG	7A	Insulation material	PA66+PC
	16AWG	10A	Mounting	Thread-less connection
	14AWG	15A	Wiring specification	20-12AWG
	12AWG	20A	Maximum Operating Temperature	T105
Rated voltage	300V ac		Pole number	3P

Product Size Drawing :

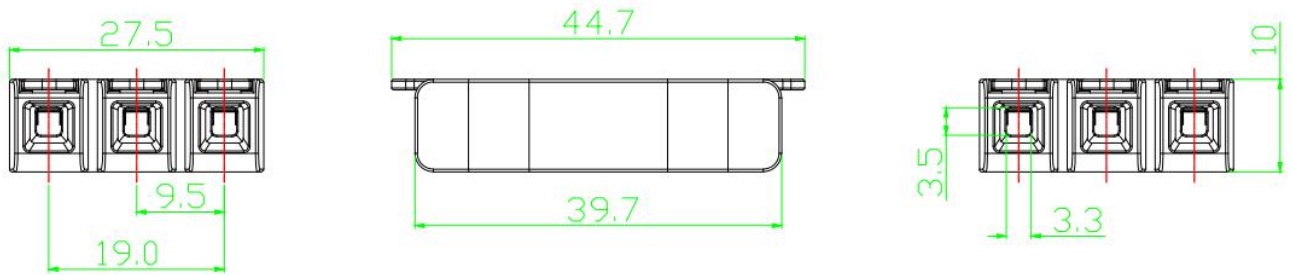

2024. 1. 1.